

Lonix Doorbell System with DND-MUR LX-DBS-S7


LX-DBS-S7 is a luxurious and easy to use doorbell system for hotels. The system comprises of an indoor unit, outdoor unit and a doorbell. The indoor unit is equipped with a sensitive, backlit touch display for the guest to indicate the need for cleaning (Make-up-Room) and privacy (Do not Disturb). The outdoor unit displays room number, the current room status and is also used for ringing the doorbell. LX-DBS-S7 features innovative design and convenient and simple operations. The backlit touch display is convenient for the guest to operate correctly even when it is dark.

Stylish DND-MUR Solution for any interior design

The doorbell system comprises of three units that are connected to each other with normal electrical cable. The distance between each unit is not limited. The outdoor unit is installed next to the entrance. It displays the need for privacy and cleaning request according to the guests wish. The indicators are lit when the appropriate icon from the indoor unit is touched. The display of the indoor unit is dimly backlit so that it is operated easily even in the dark. The appropriate icon on the indoor unit will become brighter once touched to indicate the status.

The doorbell is installed inside the room and will chime when the Bell icon on the outdoor unit is touched. The in-built logic ensures that the doorbell will not ring if the Do not Disturbed indicator is lit. Both indoor and outdoor units are built with high-quality fire-resistant materials and metal, glass, plastic, wood, stone or leather frames with optional colors

- Luxurious outdoor and indoor panels
- Sleek indoor and outdoor units with glass, metal, plastic or special frames
- Backlit touch display with big sensitive icons for easy operation
- Easy to install and link with Lonix Online Guest Room Management System
- Other S7 series items available

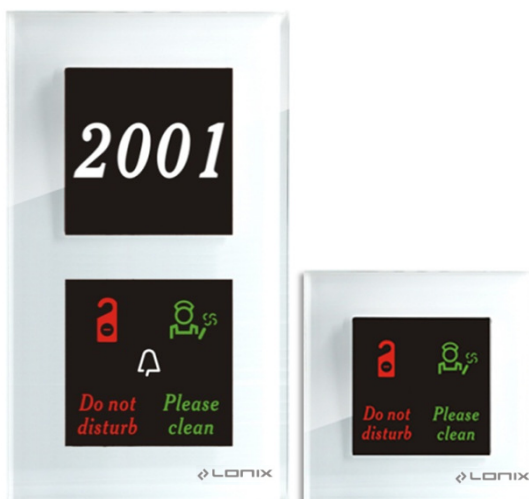


Glass Black




Leather



Brushed Steel



Stone



Wooden



Plastic

Order codes

LX-DBS-S7-Out/ Glass White

Outdoor unit, white Glass frame

LX-DBS-S7-In/ Glass Black

Indoor unit, Black Glass frame

LX-DBS-S7-Out/ Brushed Steel

Outdoor unit, Brushed Steel metal frame

LX-DBS-S7-Out/ Leather

Outdoor unit, Leather frame

LX-DBS-S7-In/ Wood

Indoor unit, Wooden frame

LX-DBS-S7-In/ Plastic White

Indoor unit, white Plastic frame

LX-DBS-S7-bell

(Bell unit, 230 VAC)

Technical Data

| | |
|------------------------|---|
| Operating Voltage: | 85 – 245V AC 50/60 Hz |
| Operating Temperature: | 10-50 °C |
| Operating Humidity: | 0 – 95% non-condensing |
| Dimensions: | Door Bell: 157 x 105 x 45 mm (HxWxD) Indoor unit: 100 x 100 x 25 mm (HxWxD) Outdoor unit: 170 x 100 x 25 mm (HxWxD) |
| Connection: | Screw Connection |
| Mounting: | All units flush mounted to standard 65 x 65 x 35 mm wall boxes |
| Service Life: | More than 100,000 Operations |
| EMC Compatibility: | CE, RoHS, FCC |
| Production Standards: | ISO-9001 |