

Lonix Lighting Switch LX-S4-xBTN

The LX-S4 series lighting switches are self-return switches with sleek design. They provide a simple yet convenient and flexible user interface for Lonix Lighting Control System in homes, hotels and offices.

The Lighting switches are available in different frame colors to match the interior design. Lighting switches are suitable for controlling lighting, curtains, sockets and hotel DND-MUR outdoor panels. Compatible Key card holder and DND-MUR outdoor units are available.

Stylish and easy to use lighting switches

LX-S4 series switches can be combined freely into dual and triple frames with tailored symbols and texts. Control buttons can be used to control individual lighting groups or to create lighting situations. Multiple frame color options enable matching switches with interior design.


- One-, Two-, Three- and Four-button self-return switches
- Stylish switch with metal frames and three standard color options
- Dual and triple frames available
- Controlled LED available for the feedback
- Tailored symbols and texts on buttons



Burshed Steel Dual Frame with LX-S4-2BTN-LED and LX-S4-4BTN



Burshed Steel Dual Frame with LX-S4-2BTN-LED and LX-S4-2BTN

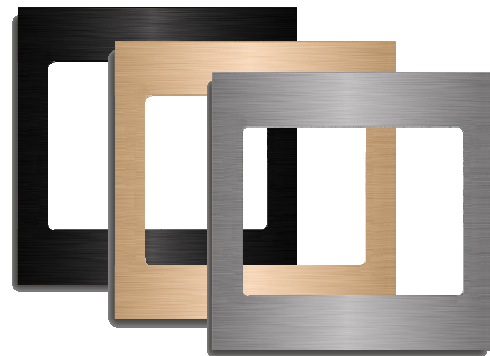

Order Codes

LX-S4-1BTN /Brushed Steel

LX-S4-2BTN /Brushed Steel

LX-S4-3BTN /Black

LX-S4-4BTN /Brushed Gold

LX-S4-2BTN-LED /Brushed Steel

1 Button, Brushed Steel metal frame

2 Button, Brushed Steel metal frame

3 Button, Black metal frame

4 Button, Brushed Gold metal frame

2 Button with Indication LEDs Brushed Steel metal frame

Technical Data

Operating Voltage for LEDs:	12 VDC
Operating Temperature:	-10 - +60 °C
Operating Humidity:	0 – 95% non-condensing
Dimensions:	86 x 86 x 46 mm (HxWxD)
Current load:	Max 10A per Circuit
Switch Type:	1-pole, 1-way per button (Make Contact)
Mounting:	All units flush mounted to standard 65 x 65 x 35 mm wall boxes
Connectors:	Screw Connectors
Service Life:	More than 100,000 times
EMC Compatibility:	CE, RoHS, FCC
Production Standards:	ISO-9001